


ROLERA-XR *FAST1394*

High-Performance Near-Infrared IEEE 1394 FireWire™ Digital CCD Camera

The QImaging Rolera-XR digital camera is designed for high-resolution infrared and visible-range scientific and industrial imaging applications. The Rolera-XR spectral range extends to 1000nm in the IR region. High-speed, low-noise electronics provide linear digital data at frame rates up to 120 fps with binning and ROI. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The Rolera-XR includes QCapture Pro software (Windows® and Mac OS) for real-time image preview and capture. A Software Development Kit (SDK) is available upon request for interfacing with custom software.

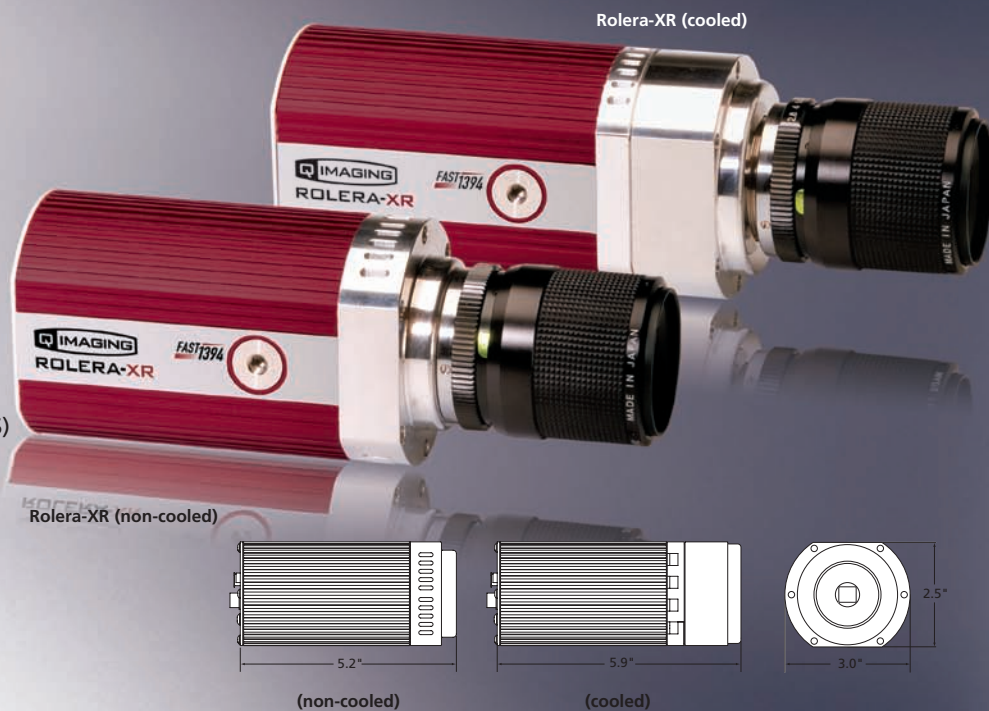

Note: Lens is shown for illustration only and is not included.

CAMERA MODELS

Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture Pro, QCapture Suite software, & access to SDK

- **Monochrome Rolera-XR Cooled**

Model: ROL-XR-F-M-12-C

- **Monochrome Rolera-XR Non-Cooled**

Model: ROL-XR-F-M-12

CAMERA OPTIONS

- **Extended Warranty**

FEATURES

High Quantum Efficiency

Large Pixels (12.9µm x 12.9µm)

High-Speed Readout

Low-Noise Electronics

Flexible Exposure Control from 10µs to 17.9min

External Sync & Trigger

ROI (Region of Interest)

Binning

Extended IR Sensitivity

IEEE 1394 FireWire™
QImaging Fast 1394 Technology

BENEFITS

- Super high sensitivity for demanding low-light & IR imaging

- High sensitivity

- Previewing & focusing in real time
- 120fps with 2x2 binning & ROI
- 20fps full resolution

- Quantitation & imaging of low light levels

- Optimal integration over a wide range of light levels

- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages

- Higher frame rates for precise analysis of rapidly changing specimens

- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate

- High-performance imaging outside the visible range


- Simple connectivity
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port
- Single-cable operation (no external power supply or control unit)

ROLERA-XR FAST1394 SPECIFICATIONS

APPLICATIONS

- Real-Time, Low-Light Infrared Imaging
- IR-DIC
- Surveillance
- Low Light Level Fluorescence
- Wafer Inspection
- Live Cell Imaging

SPECTRAL RESPONSE

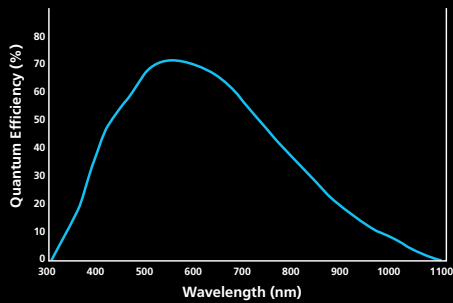

CCD SENSOR

Light-Sensitive Pixels	696 x 520
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10µs to 17.9min in 1µs increments
Sensor Type	VQE3618L progressive-scan interline CCD (monochrome)
Pixel Size	12.9µm x 12.9µm
Linear Full Well	22,000e ⁻
Dark Current	1.78e ⁻ /pix/s (non-cooled)
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	20fps full resolution @ 12 bits (165fps maximum with binning and ROI functions)

CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS*
Digital Interface	IEEE 1394 FireWire™
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	1.0 to 45x
Offset Control	-2048 to 2047
Optical Interface	2/3", C-mount optical format
Threadmount	1/4" — 20 mount
Power Requirements	7W (non-cooled); 13W (cooled); 8-24V
Weight	635g (non-cooled); 915g (cooled);
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)
Color Filter Option	No

*Refer to QImaging website for detailed listing of supported operating systems.
Note: Specifications are nominal and subject to change.

04-0010A-1

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



Tel 604.708.5061 ■ Fax 604.539.1825 ■ info@qimaging.com
www.qimaging.com